

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 3/00, 13/00	A1	(11) International Publication Number: WO 95/08794
(21) International Application Number: PCT/US94/08934		(43) International Publication Date: 30 March 1995 (30.03.95)
(22) International Filing Date: 8 August 1994 (08.08.94)		(81) Designated States: AU, CA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(30) Priority Data: 08/123,657 20 September 1993 (20.09.93) US		
(71) Applicant: CODEX, INC., a subsidiary company of MOTOROLA INC. [US/US]; 20 Cabot Boulevard, Mansfield, MA 02048 (US).		
(72) Inventors: GILBERT, Yuval; 15A Auburn Street, Brookline, MA 02146 (US). ST. PIERRE, Edgar; 1510 Highland Avenue, Fall River, MA 02720 (US). HODGSON, Brian; 17 Jackson Terrace, Newton, MA 02158 (US). BARBELL, Benita; 95 Pond Street, Sharon, MA 02067 (US).		
(74) Agents: PARMELEE, Steven, G. et al.; Motorola Inc., Intellectual Property Dept./IRW, 1303 East Algonquin Road, Schaumburg, IL 60196 (US).		

(54) Title: A MANAGEMENT AGENT SYSTEM FOR THE SUPPORT OF MULTIPLE NETWORK MANAGERS, AND A METHOD FOR OPERATING SUCH A SYSTEM

(57) Abstract

A communication system allows for the separation between the logical, external view of a network manager (10, 12) and the physical, internal view of the communication device (18, 20). A single management agent (108, 110) represents a single network manager (100, 102). The management agent (108, 110) is responsible for interpreting requests from that network manager (100, 102).

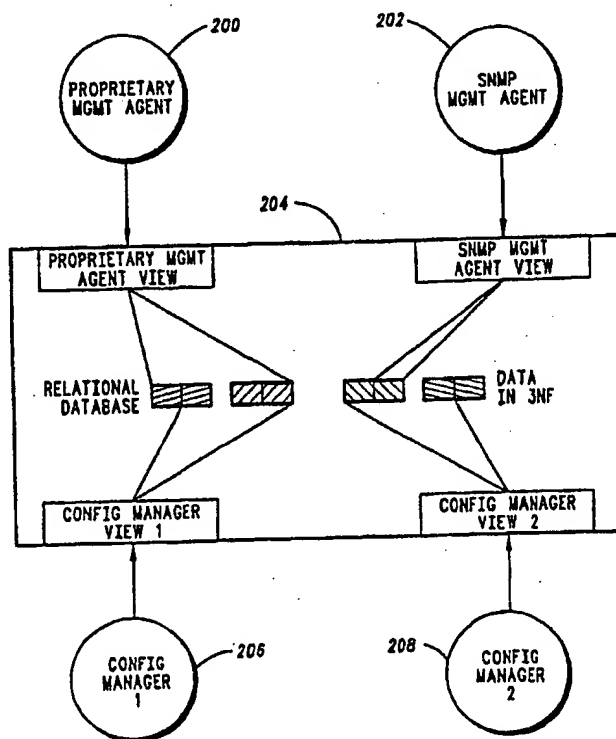

Best Available Copy

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Larvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A MANAGEMENT AGENT SYSTEM FOR THE SUPPORT OF MULTIPLE NETWORK MANAGERS, AND A METHOD FOR OPERATING SUCH A SYSTEM

5

Field of the Invention

This invention relates generally to communications networks, and specifically to the management of a communication network.

10

Background of the Invention

A communication network consists of a number of users communicating through various inter-connected communication devices. The communication devices could be terminals, host computers, multiplexers, frame handlers, etc.

15

Such a network may serve a large number of users. The management of such a network may be difficult and complex. For example, if one user desires to transfer information to another user in the network, the network must determine the most efficient path from one user to the other, determine the types of devices used to interface the user to the network, and configure the path so that the information will flow efficiently between the users.

20

25

A communication device may have a number of "views". A view is a logical grouping of one or (typically) more data items together to form a logical abstraction that represents a higher level concept for that group of parameters. For example, one view of a "port" may be that it is made up of 14 particular parameters (timers, lead values, etc). A different view of that same port may be that it is made up of 10 of those parameters plus 2 different parameters. The view may change depending on the information needed to configure or monitor the port.

30

35

When the ability to manage multiple views is not available, then all network managers on a network must share the same view. If the multiple network managers can not share the same view, then multiple versions of each configuration manager on the communications device must be produced (one for each network manager), or each management agent in the communications device must maintain a complete understanding of the system view of the communication device. Either alternative adds to the amount of memory used by the device which adds to the cost and/or reduces the available throughput of the device. Both alternatives also add significantly to the maintenance cost of the software.

A system that solves the problem of supporting multiple, diverse network managers by providing a means to translate multiple management views into the normalized, internal view of the communication device would thus be valuable.

Brief Description of the Drawings

FIG. 1 is a customer network.

FIG. 2 is a management agent system for the network/communication device.

FIG. 3 is a block diagram of the multiple views supported within the communication device.

FIG. 4 is a flow chart showing the handling of a management request by the management agent system.

Description of the Preferred Embodiment

A system is shown that allows for the separation between the logical, external view of a network manager and the physical, internal view of the communication device. A
5 single management agent represents a single network manager and is responsible for interpreting requests from that network manager.

10 A Third Normal Form (3NF) data model of the communication device, embodied in base tables within a relational database, allow the communication device management agent - on behalf of the network manager - and
15 communication device's configuration managers to map each other's specific data to this normalized view of the communication device.

This management agent system is thus easily adaptable to a communication device's changing requirements and
20 complex data modeling environment, reducing the cost of building and maintaining the system.

FIG. 1 shows a network consisting of multiple communication devices 14, 16, 18, 20 interconnected by public
25 or private leased lines through the Public Switched Telephone Network (PSTN) 22. Communication devices 14, 16, 18, 20 may be terminals, host computers, multiplexers, frame handlers, etc. Communication devices 14, 16, 18, 20 transport customer voice and data traffic through the network.
30 Attached to the communication devices at the edges of the customer network is a proprietary network manager 10. Proprietary network manager 10 configures and monitors the communication devices 14, 16, 18, 20. The Simple Network Management Protocol (SNMP) Manager 12 is coupled with the
35 network through communication device 16. The SNMP Manager

is also used to configure and monitor communication devices 14, 16, 18, 20.

FIG. 2 shows the elements of the management agent system. Proprietary network manager 100 is connected to communication device 104. SNMP Manager 102 is also connected to communication device 104.

Internal to the communication device 104, a proprietary management agent 108 provides agent functionality within communication device 104 for proprietary network manager 100 by using the protocol and semantics that are native to network manager 100. Likewise, proprietary management agent 110 provides agent functionality within communication device 104 for SNMP manager 102 by using the protocol and semantics that are native to SNMP manager 102.

The protocol and semantics native to each network manager are defined as a set of managed objects. A "managed object" is a "view", as defined earlier, specifically defined by each network manager. A managed object view may be made up of data attributes, operations and behavior (which describes what the abstract "view" such as a port will do under different conditions).

For example, proprietary network manager 100 may send an operation to communications device 104 to set the output lead of a particular port to a specific voltage level. The lead itself would be defined as a data attribute of the port managed object. The behavior would be that when that attribute is set to a particular value, then the output lead is changed to a particular voltage level. The operation, the attribute and the behavior are all part of that managed object "view". A different "view" of that same port from the SNMP manager may

require a different attribute and operation to achieve the same result.

5 Management agents 108 and 110 also maintain limited modeling knowledge of communication device 104, including knowledge of the database schema and how managed objects are configured together. The database schema is the set of logical relationships and organization applied to the data in the database. The database maintains a normalized (third
10 normal form - 3NF) representation of the configuration data for communications device 104. This is a "view" of the data which is commonly understood by all agents and configuration managers that reference the database.

15 Management agents 108,110 translate the network manager managed object "view" into the communication device normalized "view" in the database.

20 A request by network manager 100, 102 can be broken down into the following categories:

- 25 • Create Configuration--identifies a new instance of a managed object "view". Since there are many ports on communication device 104, each individual port is identified by an individual instance. Creating a new instance makes it available for configuration and monitoring.
- 30 • Delete Configuration--removes an instance of a managed object "view" for the list of instances available for configuration and monitoring.
- 35 • Read Configuration--query particular data attributes from a particular instance of a managed object "view"

- Modify Configuration--alters the value of a particular data attribute in a particular instance of a managed object "view"

5 • Perform an Action (such as activate a call)--executes particular operations on an instance of a managed object "view" that can not otherwise be performed by modifying the configuration.

10 Each management agent 108, 110 is also able to send messages to its respective network manager 100, 102 whenever significant events occur on communications device 104.

15 Management agents 108, 110 interpret the request from its respective network manager 100, 102, by translating it into a database read or write request. Configuration is validated at the management agent 108, 110, resources are validated and reserved, and then all the data written to the
20 database. Management agent 108, 110 then notifies the appropriate communication device configuration managers 114, 116. Communication managers 114, 116 implement the request. Management agent 108, 110 then formulates an appropriate response message back to the respective network
25 manager 100, 102.

Validation of a request by management agents 108, 110 are performed within the context of the managed object. Each management agent 108, 110 performs validation of network
30 manager requests to the extent that the request can be accepted into the database. This includes checking per parameter validation, such as checking data attribute boundaries (within minimum/maximum values allowed for the attribute); intra-managed object relationships, such as
35 whether one attribute will work with another attribute set to

a particular value; and inter-managed object validation, which may be the same as inter-managed object validation, but the attributes that are compared may be in different managed object "views". The validation is concerned primarily with the configuration definition, and is performed within the context of the current nodal configuration. It does not account for the instantiation of the configuration.

Not only does the management agent embody the network management view, it also has a limited understanding of the system view of communication device 104. It must know when a request is dependent on the behavior of multiple configuration managers, and how the request must be coordinated between those configuration managers 114, 116.

Each management agent 108, 110 performs the following tasks:

- Translation from network manager managed object "view" into communication device normalized "view"
- Validation of network manager requests as it pertains to the managed object "views".
- Physical resource validation & reservation (such as ports).
- Storing configuration data in the database.
- Sending notifications to the appropriate communication device configuration managers regarding changes to the configuration database.
- Translate and route managed object-specific actions to the appropriate communication device configuration manager.

- Translate and route event messages from the communication device configuration managers to the network manager.

5

Database server 112 (DBS) stores configuration data in a relational form, and thereby allows multiple views of data. DBS may be composed of a memory, such as random access memory and disk storage. DBS 112 can support having two
10 databases open at one time.

The database of DBS 112 provides a unified, normalized approach for managing configuration data, regardless of how the network managers and configuration managers "view" the
15 data. The abstraction of communication device 104 is captured in the database, where data can be accessed by specifying appropriate criteria. Direct users of DBS 112 (e.g., management agents or configuration managers) translate their private "views" into and out of the normalized tables that make up the
20 database. These direct users then use the database to create, delete, query, update, and search these tables according to varying criteria. The database contains all nodal configuration data.

25 When notified of configuration changes to the on-line configuration, configuration managers 114, 116, read those changes from DBS 112, and initiate their implementation in the node.

30 Configuration managers 114, 116 implement configuration requests within communication device 104 along functional boundaries. Configuration managers 114, 116 know about a single, on-line database which it uses to retrieve configuration data. Configuration managers 114, 116
35 implement the request by generating their own requests to the

entity or entities to be configured, such as port 118 or call 120. Port 118 may be an EIA232 port connected to a host computer, or a T1 port connected to frame handler. Call 120 may be a connection through the communications network from one EIA232 port to another EIA232 port on another communications device.

Configuration managers 114, 116 read the database via DBS 112 to obtain configuration updates and initialization data. When updates have been made, configuration managers 114, 116 read the update so that it can instantiate the change. Configuration managers 114, 116 also read the database via DBS 112 during node initialization.

The operations between either management agent 108, 110 and either or both configuration managers 114, 116 is specified as part of the configuration manager interface specification. There are a generic set of operations that are available on all configuration managers 114, 116. These operations are the same as, and follow the same definitions given earlier for Create, Delete and Modify.

FIG. 3 shows the support of multiple views by the database. One of the functions of the relational database is to provide the ability for its multiple users (clients) to maintain separate and distinct view of the data in the database. The view of proprietary network manager 100 (FIG. 2) view is embodied in a Proprietary management agent (200). Similarly, the view of SNMP manager 102 (FIG. 2) is embodied by SNMP management agent 202. A relational database 204 contains base tables defined in 3NF. Relational database 204 contains the implementation of the data model of communication device 104 (FIG. 2) and the implementation view of communication device 104 as embodied by configuration managers 114, 116.

Database 204 allows support of multiple versions of configuration data: on-line (or active), off-line (or alternate), etc. For example, "off-line" configuration data can be specified, validated, and stored in database 204 without
5 requiring communication device 104 to implement such configuration. Communication device 104 can be subsequently rebooted to use this off-line database. Only one configuration is "on-line" or active at any particular time.

10 FIG. 4 is a flow chart for the handling of management requests by the management agent system shown in FIGs. 2 and 3. Proprietary network manager 100 sends a management request to communication device 104 to configure a new port 118 (Step 302). The management request is received by
15 communication device 104 and routed to the appropriate management agent, in this case proprietary management agent 108 (Step 304). The management agent 108 validates the port configuration request for syntactic and semantic correctness (Step 306). If the request is not valid (Step 308), the
20 management agent 108 returns an error response to the network manager 100 (Step 310). If the management request is valid, the management agent 108 maps the network manager-organized configuration data for the port into the 3NF normalized form. (Step 312). Management agent 108 updates
25 the base tables containing port configuration using the database server 112 (Step 314). After the database is updated, management agent 108 notifies configuration manager 114 that there is a new port configuration data in the database (Step 316). Configuration manager 114 reads the new port
30 configuration data in 3NF form using the services of the database server 112 (Step 318). Configuration manager 114 maps the data from 3NF form into the communication device 114 specific form required to implement the port's configuration (Step 320). The configuration manager 114
35 implements the port configuration by talking to the port 118

and providing it the configuration data (Step 322). The configuration manager 114 responds to the management agent 108 that the port has been configured (Step 324). The management agent 108 sends a management response back to the network manager 100 indicating the management request was successfully completed (Step 326). Finally, the network manager 100 receives the management response from the management agent 108 (Step 328).

10

Conclusion

This combination of the following elements relational network managers 100, 102, management agents 108, 100 and database 204 storing information in (3NF) isolates the external management view from the internal physical view by the use of data mapping is new. This scheme allows for the easy addition of new "views" (e.g. management agents), which are independent from existing views, and therefore have no impact to the existing views.

20

Because each view of communication device 104 has its own model for looking at its data, these views (external models) are mapped onto a "normalized" data model which is in 3NF form. The internal views (e.g., configuration managers 114, 116) also map to the database #nf view. This allows for multiple interpretations of the management model by different portions of the communication device.

Since external modeling of a communication device can often be orthogonal to the actual internal implementation, a means to reduce the complexity of this mapping is essential. Doing this mapping using data (via a database) instead of code is the means offered in this invention.

Thus, the described system supports the capability to provide multiple views easily. This management agent system is easily adaptable to a communication device's changing requirements and complex data modeling environment. Further, the complexity of mapping between network manager and the communication device is reduced.

The system also avoids imposing the network management/user view on the internal communication device, and avoids imposing internal implementations within the communication device on the network management/user view. This avoids having changes in one view affect the other view, resulting in greater efficiency and adaptability.

The network manager/user view is hidden from internal implementations, allowing either to change as required by the network. Further, the addition of multiple network managers may be easily accomplished by adding new management agents.

All of these advantages add up to reduced development and maintenance costs for communications device 104, as well as reduced random access memory utilization in the device, thereby reducing its cost to manufacture.

We Claim:

1. A management agent system for a communication device comprising:
 - 5 a network manager for configuring the communication device, the network manager having configuration information for configuring the communication device;
 - 10 a communication device management agent, coupled to the network manager, where the communication device management agent handles management requests on behalf of the network manager;
 - 15 a communication device database, coupled to the communication device management agent, where the communication device management agent stores configuration information for the communication device;
 - 20 a communication device configuration manager, coupled to the communication device database and the communication device, the communication device configuration manager reading the configuration information from the communication device database, and then configuring the communication device.
 - 25
2. The management agent system of claim 1 where there are a plurality of network managers.
3. The management agent system of claim 2 where the
 - 30 communication device management agent maps the communication device information into the communication device database.
4. The management agent system of claim 3 where the
 - 35 mapping of the communication device information into the

communication device database converts the communication device information into a third normal form.

5 5. The management agent system of claim 4 where at least two of the network managers have different organizational views of the communication device information.

10 6. The management agent system of claim 5 where the communication device configuration manager converts the communication device information stored in the communication device database from third normal form into information for configuring the communication device.



15 7. A method of configuring a communication device comprising the steps of:
 storing configuration information about a communication device in a communication device database;
 reading the configuration information from the communication device database;
20 configuring the communication device from the configuration information.

25 8. The method of claim 7 where the step of storing configuration information includes the step of converting the configuration information into third normal form and the step of reading the configuration information from the communication device database includes converting the configuration from third normal form into a configuration information organization recognizable by the communication
30 device.


35 9. The method of claim 8 where the step of configuring the communication device includes sending a command to the communication device instructing the communication device to begin configuration.

10. The method of claim 9 where the step of configuring the communication device includes the step of updating one of more of the versions of the configuration data in the communication device database.
- 5

1/4

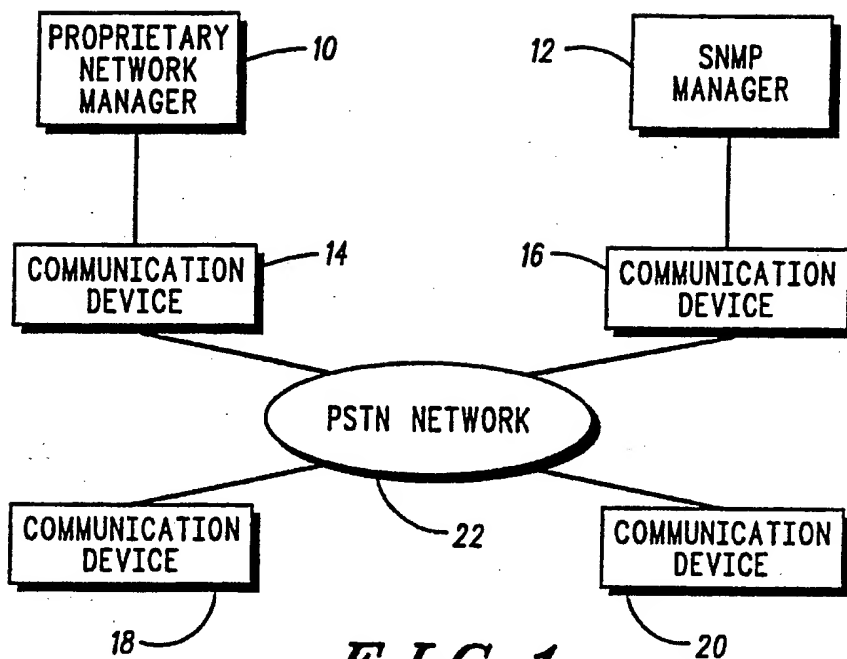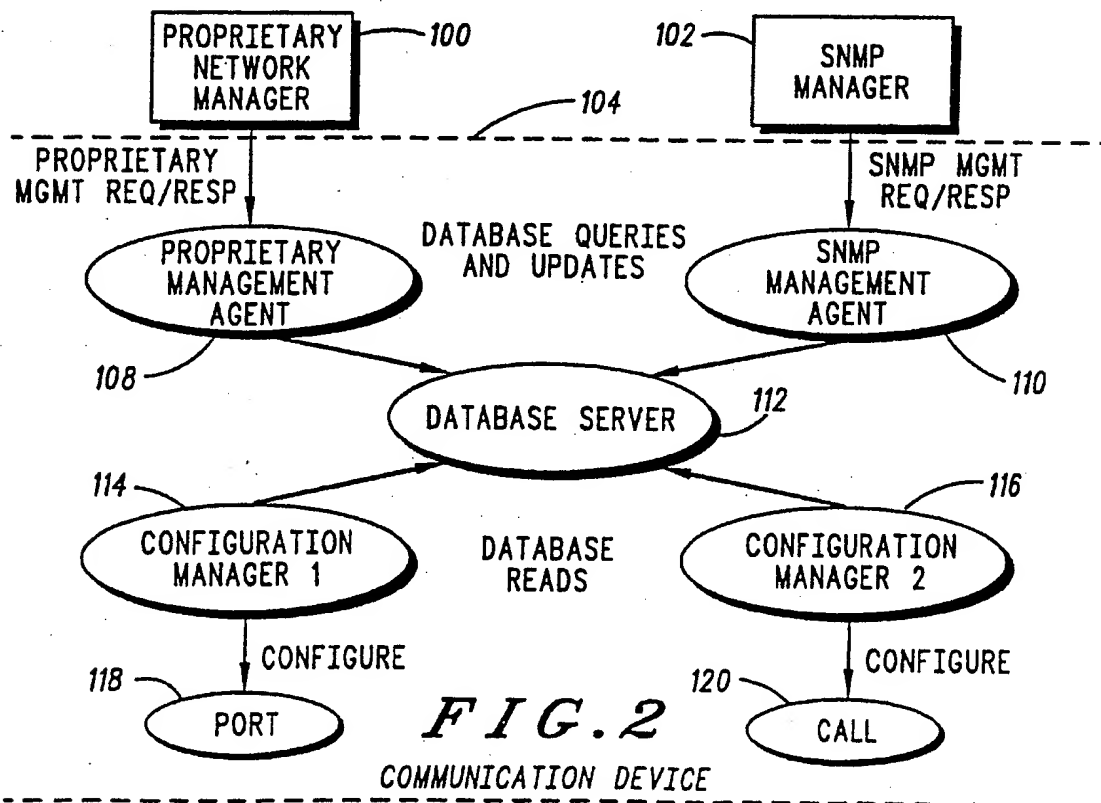*FIG. 1**FIG. 2*

2 / 4

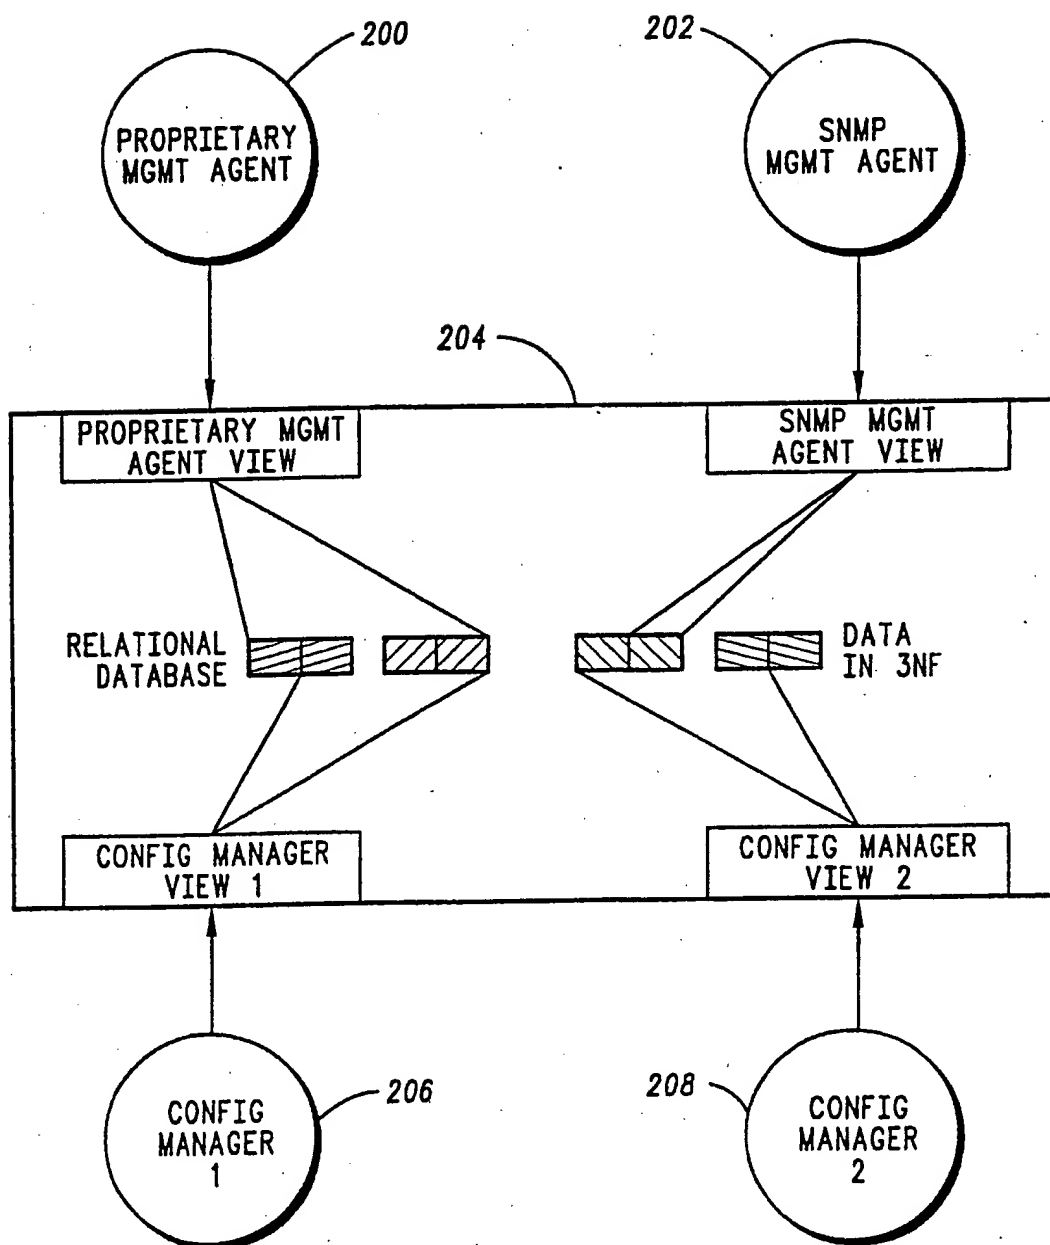**FIG. 3**

3 / 4

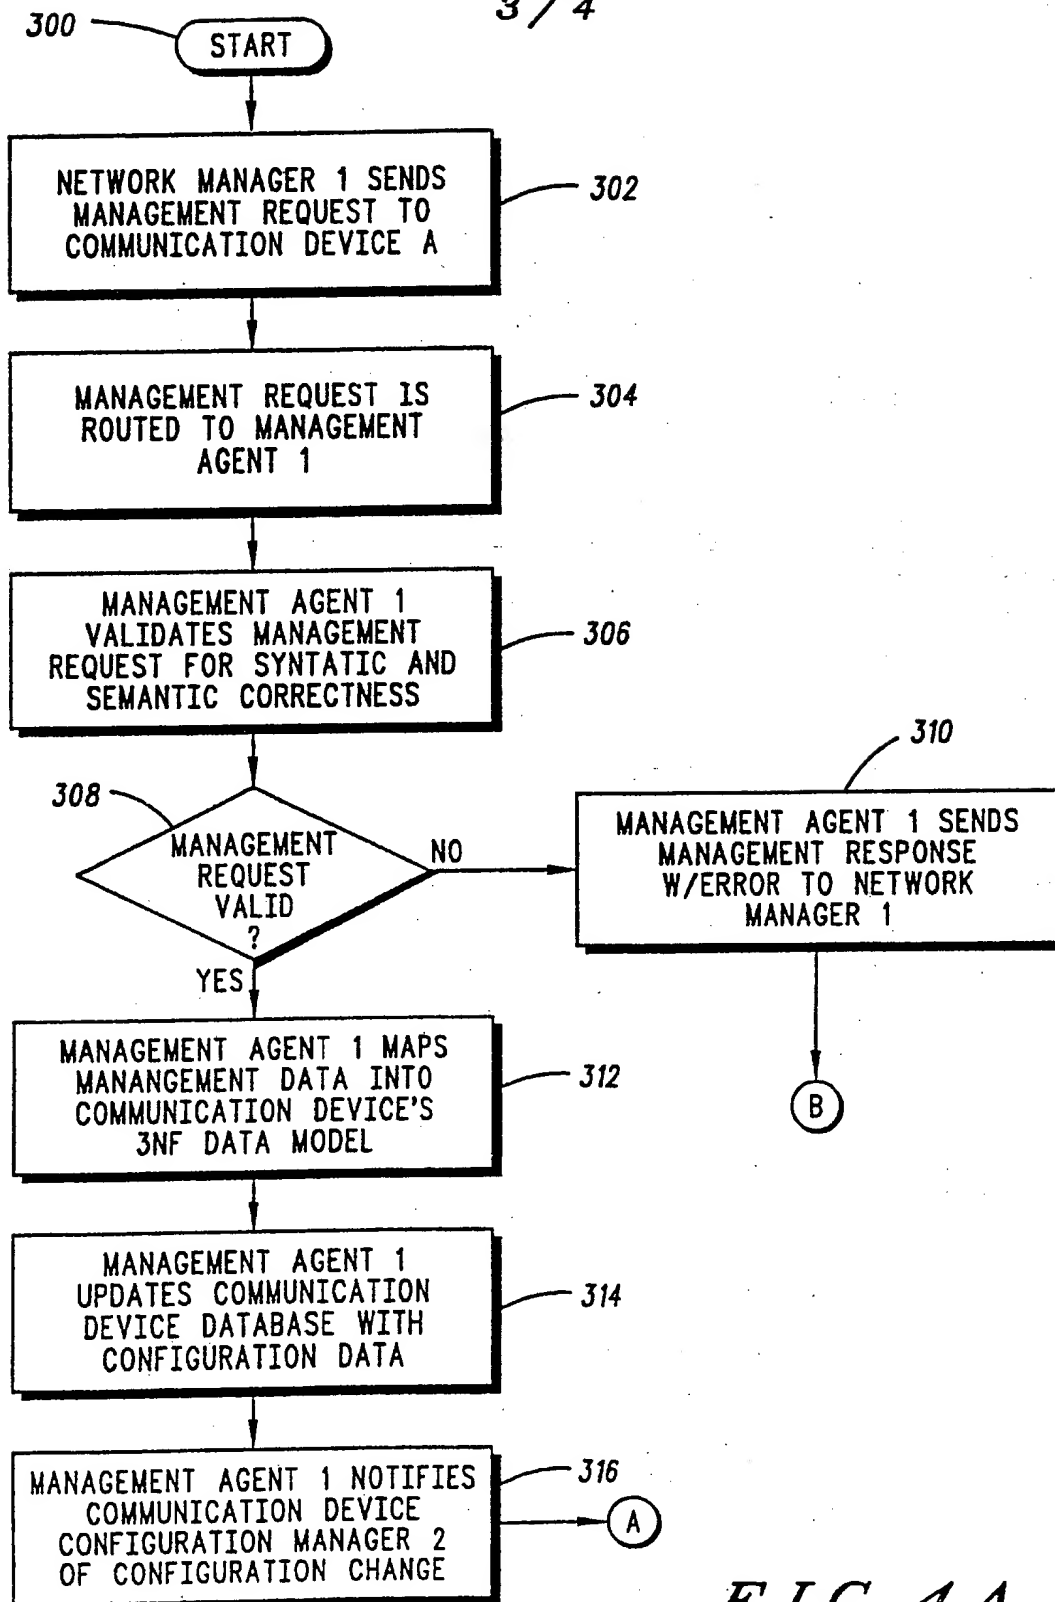


FIG. 4A

4 / 4

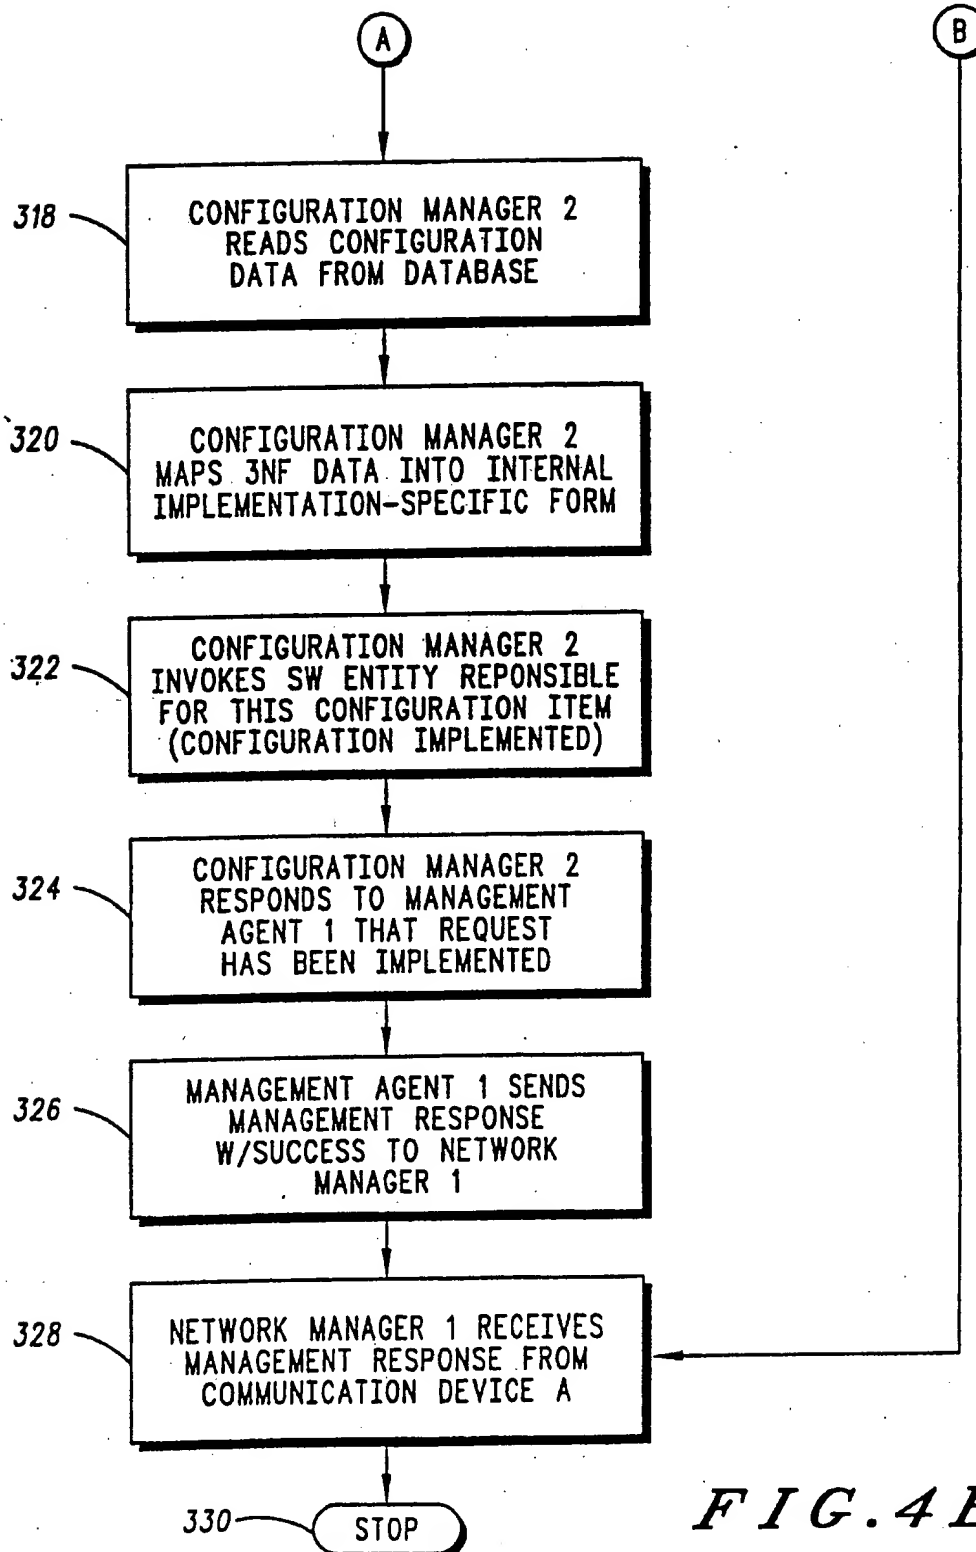


FIG. 4B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/08934

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :G06F 3/00, 13/00 US CL :395/200, 500, 600,800 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 395/200, 500, 600, 800 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS US FILE, IEEE INSPECT FILE, DIALOG DATABASE		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US, A, 5,136,716 (Harvey et al) 04 August 1992, see figs. 1 and 3A; col. 2, lines 26-50, col. 4, lines 33-35	1-2, 7 ----- 3-6, 8-10
Y	US, A, 5,165,018 (Simor) 17 November 1992, see fig. 1; col. 4, lines 35-66; col. 48, lines 5-6.	1-10
Y	US, A, 4,622,633 (Ceccon et al) 11 November 1986, see col. 1, lines 9-11; col. 3, lines 36-38; col. 47, lines 39-62; col. 48, lines 44-47.	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* "A" "E" "L" "O" "P"	Special categories of cited documents: document defining the general state of the art which is not considered to be part of particular relevance earlier document published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "G" document member of the same patent family
Date of the actual completion of the international search 08 DECEMBER 1994		Date of mailing of the international search report JAN 20 1995
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer <i>B. Hagedorn</i> MENG-AI T. AN Telephone No. (703) 305-9678

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)

This Page Blank (uspto)

This Page Blank (uspto)